

Date tehnice pentru produs: AC181242--

Dulap inseriabil cu 2 uși IP55 Î=1800 L=1200 A=400 mm

tablă de oțel, RAL7035, cu contrapanou, ușă cu fixare în 4 pct, mâner prin apăsare-tragere



SCHRACK-Info

- **Material** : Frame: 1.5 mm sheet steel. Doors: Single door and double door: 2 mm sheet steel. Rear, roof and side panels: 1.5 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments with the **ACMPD002** accessory.

As insertion aid of the mounting plate we recommend the use of slide-in rails **ACCLT400** (for depth 400 mm), **ACCLT500** (for depth 500 mm), **ACCLT600** (for depth 600 mm) and **ACCLT800** (for depth 800 mm). The slide-in rails are inserted in the floor, after sliding and fixing of the mounting plate they can be removed and reused in the next enclosure

- **Bottom plates** : 1 mm galvanised sheet steel, consists of
 - two-part bottom plate at depths 400 and 500 mm,
 - three-part bottom plate at depth 600 mm and
 - four-part bottom plate at depth 800 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures door is mounted on four double-sided hinges allowing left- or right-hand opening. On double door enclosures, hinges are not reversible. Doors for left-hand opening have to be ordered separately. All door panels including the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and 5 mm DIN double-bit key lock (DDB), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever


- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided
- **Side panels** : ACSW... supplied in pairs as accessory. Mounting mark visible on the side of the frame profile
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door and double door IP55
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Frame with fitted door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure to enable bayging while still on the pallet. All packing material is recyclable. In 400 mm wide enclosures a mounting plate, bottom plates and door frame are not included
- **Mounting requirement** : Standard delivery ready for combined installation. For stand-alone installation add side panels



Fișe tehnice

Lățime netă (mm)	1.200,00
Înălțime (mm)	1.800,00
Adâncime netă (mm)	400,00
Masă netă (kg.)	166,20
Temperatura minimă a mediului ambiant (°C)	-10
Temperatura maximă a mediului ambiant (°C)	60
Material	tablă de oțel
Categorie produs	Modular enclosure
Total Load Capacity (kg.)	1500
Grosimea peretelui corpului (mm)	1,50
Grad de protecție	IP55
Contrapanouri	galvanized sheet steel 3mm
Mounting Plate Load Capacity (kg.)	1500
Grosimea peretelui contrapanoului (mm)	3
Înălțimea contrapanoului (mm)	1691
Lățimea contrapanoului (mm)	1097
Adâncimea contrapanoului (mm)	3
Număr de uși	2
Load capacity per door (kg.)	100
Grosimea peretelui ușii (mm)	2
Număr de plăci de bază	4
Lățime placă de bază (mm)	1030
Culoare	Gri deschis
disipare (W)	-961,00
Clasă de protecție	I

Dimension drawing

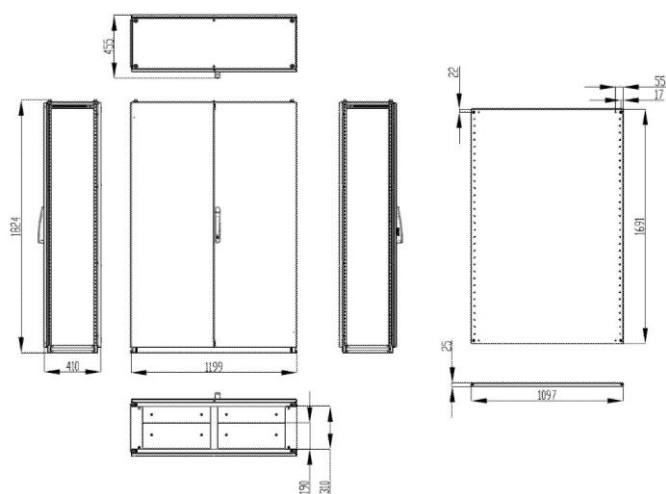

Tabel articole

Descriere	Cod comandă
Dulap inseriabil cu 2 uși IP55 Î=1800 L=1200 A=400 mm tablă de oțel, RAL7035, cu contrapanou, ușă cu fixare în 4 pct, mâner prin apăsare-tragere	AC181242
Accesorii opționale	
Pereți laterali din oțel (pereche) Î=1800 A=400 mm, RAL 7035	ACSW1804
Set elemente laterale (pereche) soclu din oțel, A=400 Î=100mm preassembled, sheet steel RAL9005 (Jet black)	ACSOT041
Set elemente față-spate soclu din oțel, L=1200 Î=100 mm RAL9005, 1 Set=2 buc	ACSOB121
Set elemente laterale (pereche) soclu din oțel, A=400 Î=200mm preassembled, sheet steel RAL9005 (Jet black)	ACSOT042
Set elemente față-spate soclu din oțel, L=1200 Î=200 mm RAL9005, 1 Set=2 buc	ACSOB122
Acoperiș predecupat pentru plăci de trecere L1200 A400m Potrivite pentru dulapuri AC/KC, plăci de trecere: WSTBT2117G, WSTBT2125G, WSTBT2130G, WSTBT2135G, WSTBT2150G, IG712100, IG712102, IG712200, IG712205, IG712211, IG712222, IG712223, IG712512, IG712516	ACRCE1204
Șine glisare plăci montaj în dulapuri A=400, set de 2 buc. of series AC and KC, PU=1 pair	ACCLT400
Set pt. fixarea îmbinării la dulapuri (intern și extern) cu 4 urechi de fixare și accesorii de montaj	ACCCIO60
Bandă de etanșare din polietilenă PE-01, IP55	ACSPDG01
Urechi de ridicare M12 pt. dulapuri AC și KC 1 Set=4 piese	ACLE9301
Suport documentație, autoadeziv, A4	ASDRA400
Piuliță clipsabilă M6 (1 set=10 buc.)	ACCNM615
Șurub cu cap bombat M6x16 conform ISO 7380 1 Set=10 piese	ACCNK006
Piuliță clipsabilă M8 (1 set=10 buc.)	ACCNM815
Șurub cu cap bombat M8x16 conform ISO 7380 1 Set=10 piese	ACCNK008
DIN-rail low, unperforated, sendzimir zincat Price per piece	BK14004--B
Șină omega din oțel zincat, 2000x35x7,5mm, perforată Pretul este pe bucata de 2 m.	BK14005--A
DIN-rail high, unperforated, sendzimir zincat DIN-rail high, unperforated, sendzimir zincat	IL14035--A
DIN-rail high, Long Hole 18x6.3mm, sendzimir zincat Price per piece	IL14037

Tabel articole

Descriere	Cod comandă
Accesorii opționale	
Cheie metalică cu 2 pini de 5 mm	DV903532
PU=1 piece	