

**Included****Optional**

Carry Case for Blue Smart IP65 Chargers and accessories




Wall mount



Rubber Bumper

Blue Smart IP65 Charger 120V	12V 4/5/7/10/15A	24V 5/8A
Input voltage	120 VAC	
Efficiency	94%	95%
Standby power consumption	0.5W	
Minimum battery voltage	Starts charging from down to 0V	
Charge voltage 'absorption'	Normal: 14.4V High: 14.7V Li-ion: 14.2V	Normal: 28.8V High: 29.4V Li-ion: 28.4V
Charge voltage 'float'	Normal: 13.8V High: 13.8V Li-ion: 13.5V	Normal: 27.6V High: 27.6V Li-ion: 27.0V
Charge voltage 'storage'	Normal: 13.2V High: 13.2V Li-ion: 13.5V	Normal: 26.4V High: 26.4V Li-ion: 27.0V
Charge current	4 / 5 / 7 / 10 / 15A	5/8A
Charge current in low current mode	2 / 2 / 2 / 3 / 4A	2 / 3A
Temperature compensation (lead-acid batteries only)	16 mV/°C (9mV/°F)	32 mV/°C (18mV/°F)
Can be used as power supply	Yes	
Back current drain	0.7Ah/month (1mA)	
Protection	Reverse polarity Over temperature	Output short circuit
Operating temp. range	-40 to +60°C (full rated output up to 30°C)	-40 to +140°F (full rated output up to 90°F)
Humidity (non condensing)	Max 95%	
<b>ENCLOSURE</b>		
Battery-connection	Black and red cable of 1.5 meter (4.9 feet)	
120 V AC-connection	Cable of 1.8 meter (5.9 feet) with US NEMA 1-15 plug	
Protection category	IP65 (splash and dust proof, and ignition protected)	
Weight	0.9kg (2lbs)	0.9kg (2lbs)
Dimensions (h x w x d)	12/7: 47x95x190mm 1.8x3.7x7.5 inches Other: 60x105x190mm	24/8: 60x105x190mm 2.3x4.1x7.5 inches
<b>STANDARDS</b>		
Safety	UL 1236, CSA C22.2, EN 60335-1, 60335-2-29	
Emission	EN 55014-1, EN 61000-6-3, EN 61000-3-2	
Immunity	EN 55014-2, EN 61000-6-1, EN 61000-6-2, EN 61000-3-3	

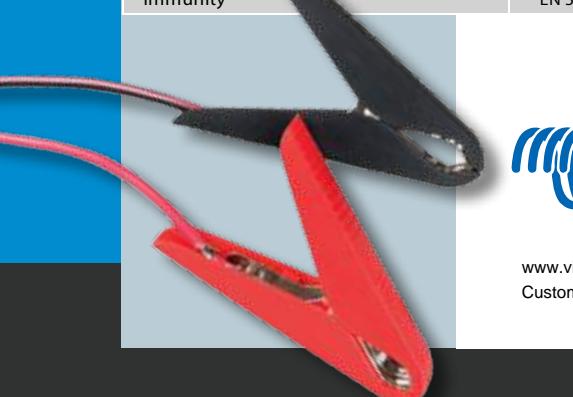

**victron energy**  
BLUE POWER

www.victronenergy.com  
Customer support: sales@victronenergy.com

# Blue Smart Charger

IP65  
The professional's choice

5

YEAR  
WARRANTY

- Water, dust and chemical resistant
- Seven step smart charge algorithm
- Recovery of fully discharged 'dead' batteries
- Automatic power supply function
- Severe cold performance: down to -30°C
- Several other battery life enhancing features
- Low power mode to charge smaller batteries
- **Li-ion** battery mode
- Setup and configure, readout of voltage and current by **Bluetooth Smart**




**victron energy**  
BLUE POWER

## Ultra high efficiency “green” battery charger

With up to 95% efficiency, these chargers generate up to four times less heat when compared to the industry standard. And once the battery is fully charged, power consumption reduces to 0,5 Watt, some five to ten times better than the industry standard.

**Durable, safe and silent**

- Low thermal stress on the electronic components.
- Protection against ingress of dust, water and chemicals.
- Protection against overheating: the output current will reduce as temperature increases up to 60°C, but the charger will not fail.
- The chargers are totally silent: no cooling fan or any other moving parts.

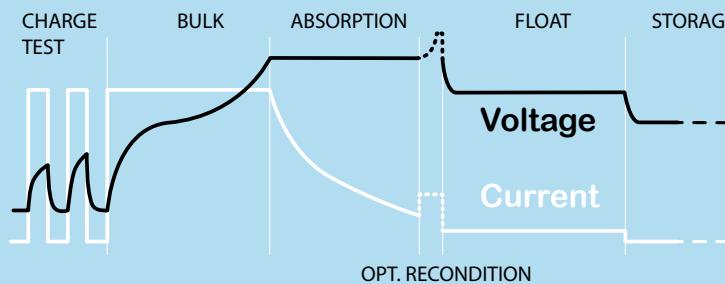


## Reconditioning

A lead-acid battery that has been insufficiently charged or has been left discharged during days or weeks will deteriorate due to sulfation. If caught in time, sulfation can sometimes be partially reversed by charging the battery with low current up to a higher voltage.

## Recovery function for fully discharged batteries

Most reverse polarity protected chargers will not recognize, and therefore not recharge a battery which has been discharged to zero or nearly zero Volts. The **Blue Smart IP65 Charger** however will attempt to recharge a fully discharged battery with low current and resume normal charging once sufficient voltage has developed across the battery terminals.


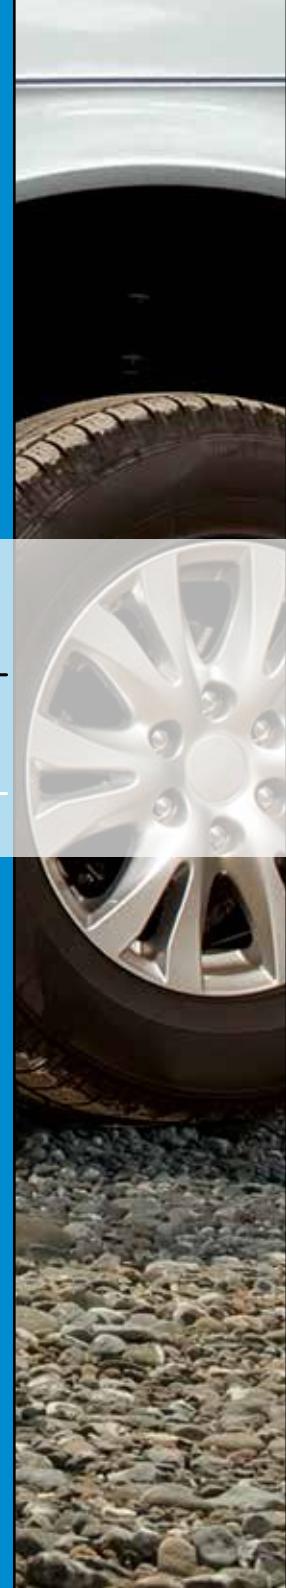


## The VictronConnect app

Setup, readout and configure your ***Blue Smart IP65 Charger*** via your smartphone.

You can display the status of your charger and battery and even control the functions of your charger using the VictronConnect app. On your screen the readout of voltage and current is default available.

**Download your app for iOS and Android here at**  
<https://www.victronenergy.com/live/victronconnect:start>

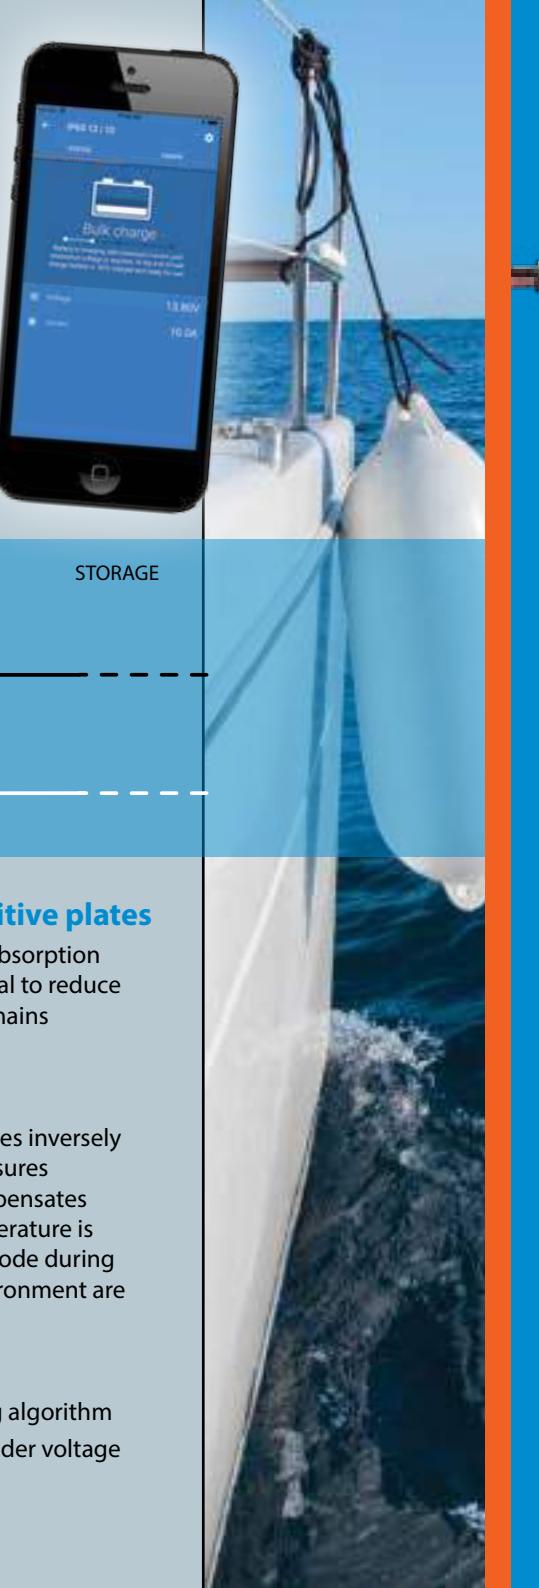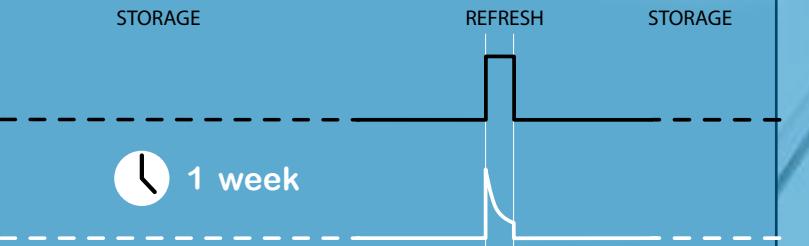

# IP65 - Charger Guide



**recommended** is the best charger for this type of battery. The battery will be charged in the most efficient way.

OK

**OK** This charger can be used for this battery. It is possible that it takes longer to charge the battery than using a recommended charger.

