


Date tehnice pentru produs: BSB90121--

Bareta 4P, L1/L2/L3/N, 10mm²

Not possible to break off, shortenable on both sides, TE=17.8mm

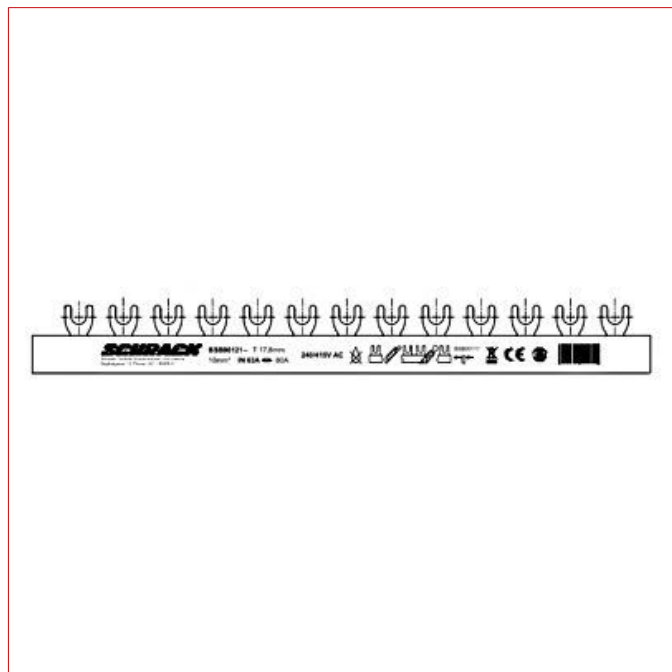

Schrack-Info

- Fork-Busbar for wiring of devices with: Dual-function terminal, screw terminal, screw connection, bracket terminal, flat terminal
- Division unit 17.8mm
- 57 MW
- Phase sequence: L1, L2, L3, N, ... L1, L2, L3, N (other applications possible)


Fișe tehnice

Secțiune (mm ²)	10
Standard produs	EN 61439-1
Max. current beginning	63A
Max. current middle	100A
Material	E-Cu-ETP
Material izolație	PC
Fără halogen	According DIN EN 50267-2-2
Gama de temperatură - Funcționare (°C)	til 125
Rezistența la fir încins (°C)	960
Overvoltage category	3
Tinere la impuls de tensiune [Uimp] (V)	4k
Tensiune nominală	400V-AC


Fișe tehnice - Continuare

Rezistență la scurtcircuit (kA)	100Agl / 25
Stabilitate dielectrică	36kV/mm
Grad de poluare	2
Condiții climatice	IEC 68-2
Fire classification	2
Tracking resistance	CTI 600
disipare (W)	21,20


Dimensions in mm

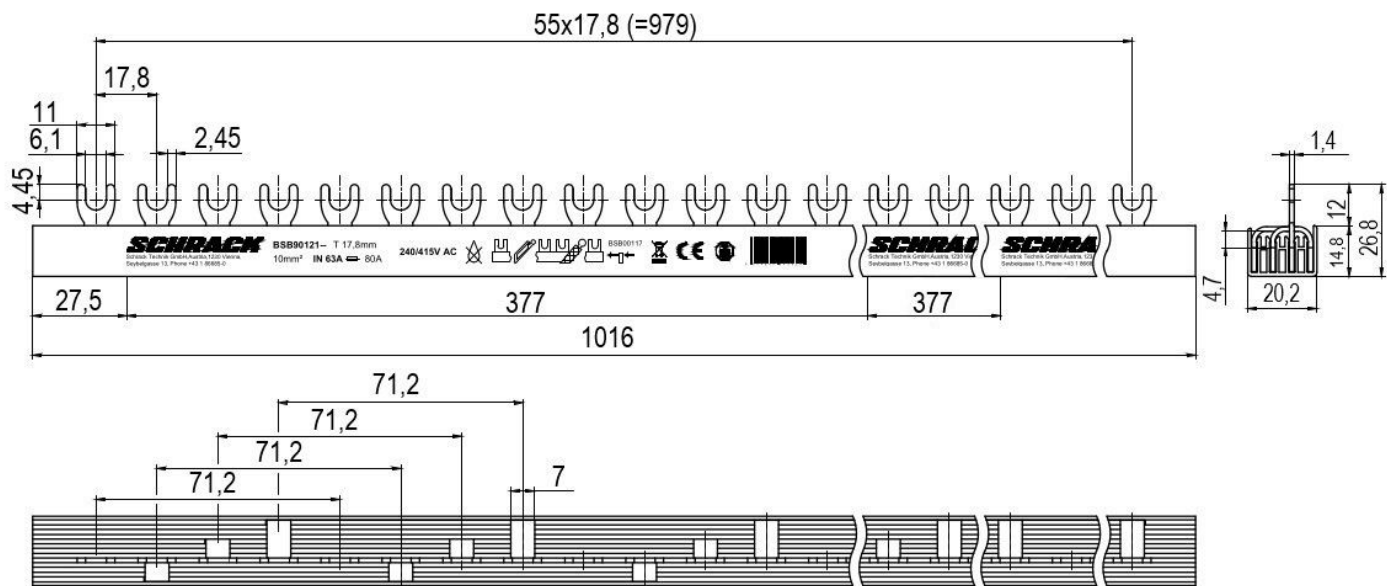

Feeding at beginning or end of busbar

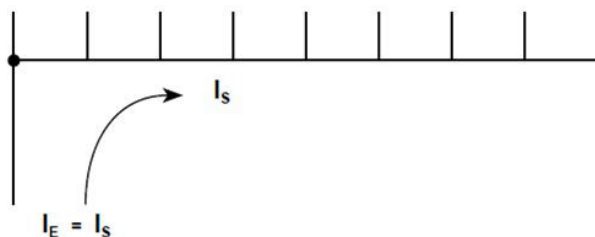

Other feedings

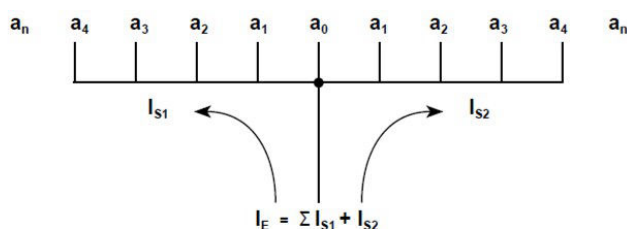

Tabel articole

Descriere	Cod comandă
Bareta 4P, L1/L2/L3/N, 10mm ²	BSB90121
Not possible to break off, shortenable on both sides, TE=17.8mm	
Accesorii necesare	
Capac protectie barete 4P 10mm ²	BSB00117
End-cap for isolation on the ends of bthe busbars	