


Date tehnice pentru produs: HSEAP842WF

Doză PT pentru HSEDx2UWxx, H=42mm, RAL 9010

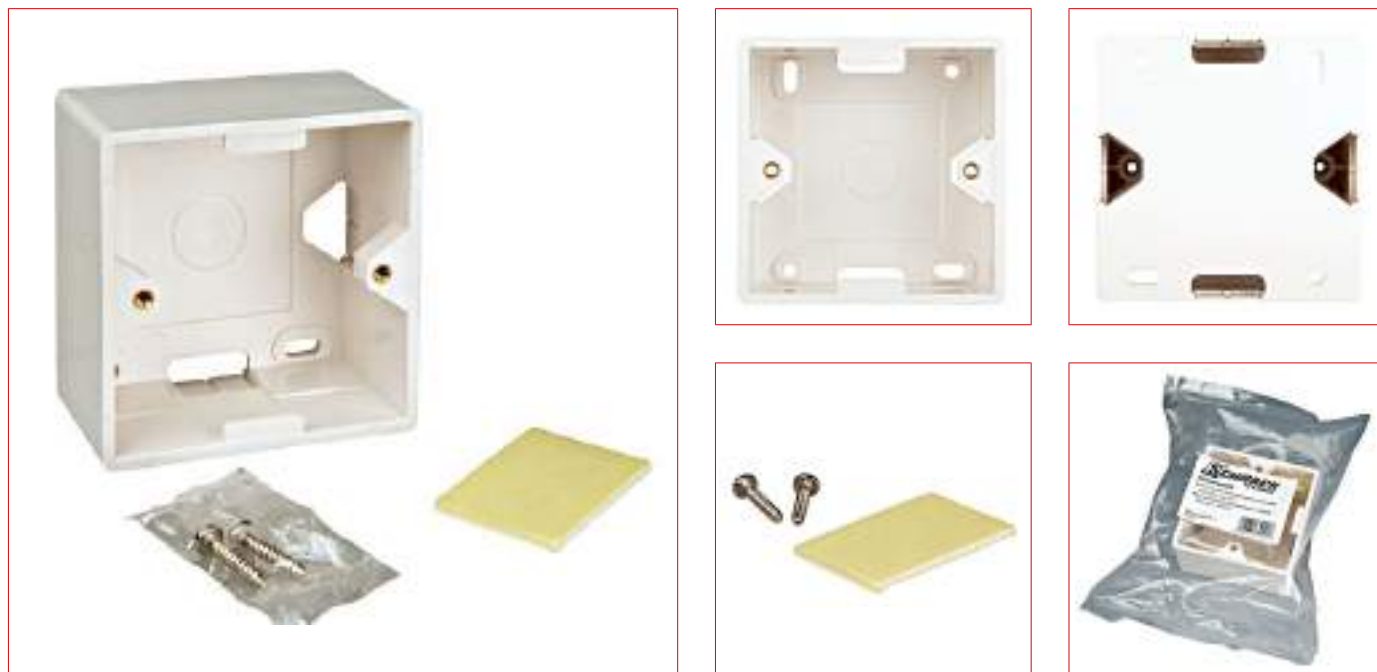

SCHRACK-Info

Material: Halogen-free

The scope of delivery includes two screws which are used for wall mounting. Dowels must be provided on site. Alternatively, the included double-sided adhesive tape can also be used.

Screws for mounting the outlets to the wallmount box are included with the TOOLLESS LINE outlets (HSED0xUWyS).


When mounting the DE-EMBEDDED LINE outlets (HSEDG2UW6x) to the wallmount box, the HSEDZBES accessory set must be used, which contains the necessary screws.



Fișe tehnice

Lățime netă (mm)	80,00
Înălțime (mm)	40,00
Format SCHRACK	SFA and SFB
Tip soclu	80x80mm
Montaj	Pe tencuială
Culoare	Alb pur
grad de protecție	IP20

Desen dimensional: Doză PT pentru HSEDx2UWxx, H=42mm, RAL 9010

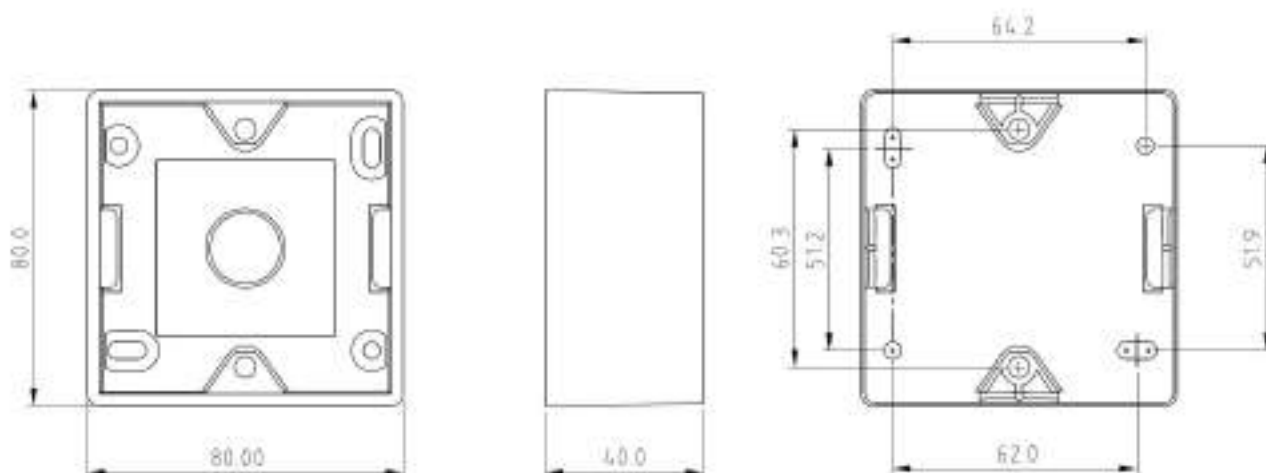

Tabel articole

Descriere	Cod comandă
Doză PT pentru HSEDx2UWxx, H=42mm, RAL 9010	HSEAP842WF
Accesorii opționale	
Priză pt. 2 module TOOLLESS LINE, 80x80mm, înclinat, RAL9010	HSED02UW2S
Ramă suport pentru 2 module TOOLLESS LINE (SFB)	HSED02UWBS
Priză pt. 1 modul TOOLLESS LINE, 80x80mm, înclinat, RAL9010	HSED01UW2S
Placa fata pt.3 module Keystone	HSED03UW2S
Priză pt. 2 module TOOLLESS LINE, 80x80mm, drept, RAL9010	HSED02UW1S
Priză de date C6 10 GB clasa Ea, ecranat, 2xRJ45 încălzită, RAL9010, Alb pur, placă centrală UAE, Compatibilă cu programul de interschimbare	HSEDG2UW6R
Priză de date C6, ecranat, 2xRJ45	HSEDG2UW6P
Etichetă inscripționare+șuruburi pt. HSED0xUWyS, TOOLLESS	HSEDZBES