

Date tehnice pentru produs: MGF17025-A

Ampermetru 72*72mm, 25A, conexiune directă, DC



Fișe tehnice


Tip	panou frontal
Domeniu măsură	25A
Mărime	72x72mm
Afișaj	analog
Standard	IEC 51 VDE 0410 EN 60051
Accuracy	1,50 percent
Overload (continuous)	1,5 In
Overload (short-time)	5 In 30s
Isolation test voltage	2 kV R.M.S 50 Hz/1 min
Reference temperature (°C)	+10 bis +30
Gama de temperatură - Transport/Depozitare (°C)	-25 to +40
disipare (W)	1,20
Metodă de montaj	Instrument for vertical mounting
Grad de protecție	IP52 (front), IP00 (connections)
Burden	1,0VA
Rezistența la vibrații	VDE 0410, 2,5g, ±0,25mm, 50Hz

Fișe tehnice - Continuare


Rezistența la șoc

VDE 0410, 15G

Schema electrică: Ampermetru 72*72mm, 25A, conexiune directă, DC

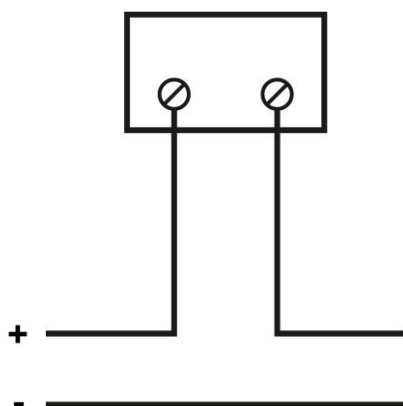

Desen dimensional: Ampermetru 72*72mm, 25A, conexiune directă, DC

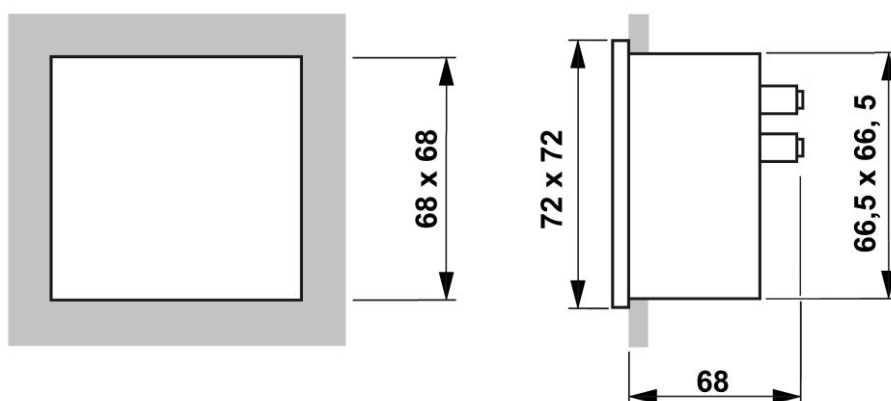

Descriere

Cod comandă

Ampermetru 72*72mm, 25A, conexiune directă, DC

MGF17025-A