

Date tehnice pentru produs: MGF54025-A

# Ampermetru 48\*48mm, 25A, conexiune directă, AC




## Fișe tehnice

|                                                 |                                                                   |
|-------------------------------------------------|-------------------------------------------------------------------|
| Tip                                             | panou frontal                                                     |
| Domeniu măsură                                  | 25A                                                               |
| Mărime                                          | 48x48mm                                                           |
| Afișaj                                          | analog                                                            |
| Standard                                        | EN 50081<br>BS-89<br>VDE 0410<br>EN 60051<br>EN 50082<br>EN 61010 |
| Accuracy                                        | 1,50 percent                                                      |
| Overload (continuous)                           | 1,5 In                                                            |
| Overload (short-time)                           | 5 In 30s, 10 In 5s, 40 In 1s                                      |
| Isolation test voltage                          | 2 kV R.M.S 50 Hz/1 min                                            |
| Reference temperature (°C)                      | +10 bis +30                                                       |
| Gama de temperatură - Transport/Depozitare (°C) | -25 to +40                                                        |
| disipare (W)                                    | 1,20                                                              |
| Metodă de montaj                                | Instrument for vertical mounting                                  |


## Fișe tehnice - Continuare

|                        |                                     |
|------------------------|-------------------------------------|
| Grad de protecție      | IP52 (front), IP00 (connections)    |
| Burden                 | 0,4VA                               |
| Domeniul de frecvență  | 15-100Hz                            |
| Rezistența la vibrații | VDE 0410, 2,5g, $\pm 0,25$ mm, 50Hz |
| Rezistența la șoc      | VDE 0410, 15G                       |

## Schema electrica: Ampermetru 48 \* 48mm, 25A, conexiune directă, AC

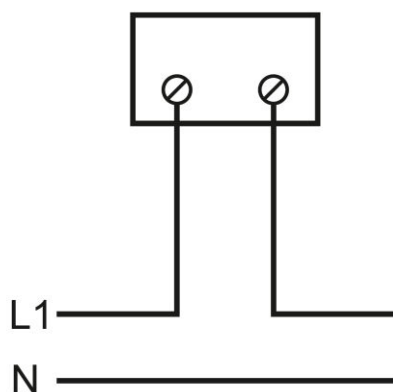

## Desen dimensional: Ampermetru 48 \* 48mm, 25A, conexiune directă, AC

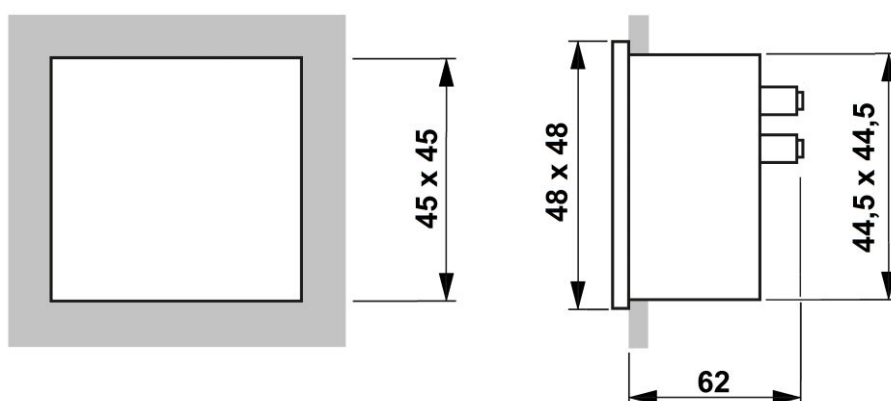

| Descriere                                      | Cod comandă |
|------------------------------------------------|-------------|
| Ampermetru 48*48mm, 25A, conexiune directă, AC | MGF54025-A  |