

Date tehnice pentru produs: NLKSCS003W

Corp de iluminat de urgență KS Wireless LED 3h 230V AC

Montare universală, cu baterie LiFePO₄, comutabilă, cu LED High Power 4x0,5W, cu capac transparent pentru lumină suplimentară a căii de salvare, distanță de vizualizare: 22m, 170lm



Fișe tehnice



Lungime (mm)	250,00
Lățime netă (mm)	34,00
Înălțime (mm)	174,00
Masă netă (kg.)	0,60
Tip iluminare	Combined rescue path and rescue sign luminaire semn (corp) iluminat siguranță lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	control wire-less
Versiune	corp iluminat din plastic lampă iluminat marginală
Tip	KS
Fără halogen	Housing made of halogen-free plastic

Fișe tehnice - Continuare




Culoare	RAL 9005 (negru)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top and white foil for single side use) included in accordance with ISO 7010
Domeniu recunoaștere (m.)	22
Timp autonomie (h)	3
Sursă de lumină	LED (2W)
Lumen	190
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterie (V/Ah)	3,2/3,0 LiFePO4
grad de protecție	IP54
Rezistentă la impact	≥ IK03
Montaj	Montaj de perete recessed mounting ceiling optional Montaj încadrat în plafon universal
Temperatura minimă a mediului ambiant (°C)	-5
Temperatura maximă a mediului ambiant (°C)	40
AA Class E 8101	AA4
Fabricant	Schrack

Dimensions (mm)



NLKS...

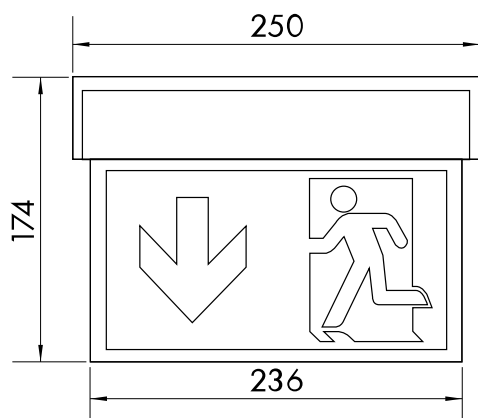

NLKME

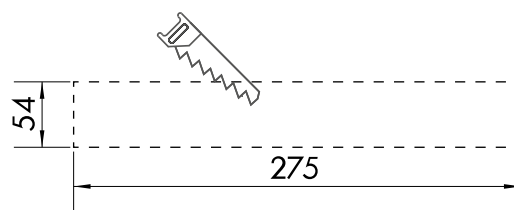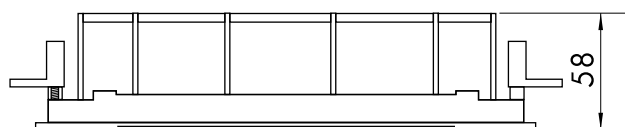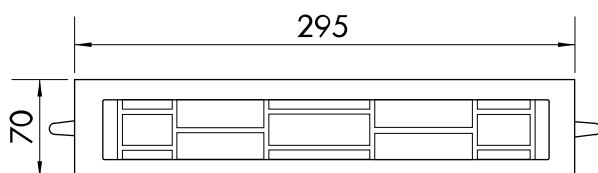

Drilling distances (mm)

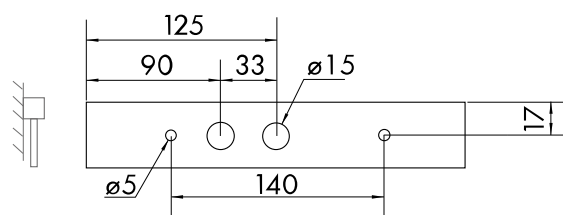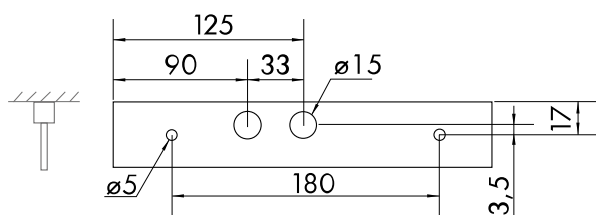

Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 3h Autonomiezeit

					
2,00	3,01	7,45	7,31	6,8	2,73
2,50	1,71	8,22	7,95	7,38	3,09
3,00	1,24	7,01	6,74	8,07	3,15
3,50	1,21	6,33	6,34	8,72	2,89
4,00	1,24	3,56	6,18	8,9	2,82
5,00	1,08	3,45	5,58	8,17	2,02

Tabel articole

Descriere	Cod comandă
Corp de iluminat de urgență KS Wireless LED 3h 230V AC Montare universală, cu baterie LiFePO4, comutabilă, cu LED High Power 4x0,5W, cu capac transparent pentru lumină suplimentară NLKSCS003W a căii de salvare, distanță de vizualizare: 22m, 170lm	
Accesorii opționale	
Accu 3,2V 3,0Ah LiFePO4 ptr.LED C.il KM,KSC,KMB,ASM,ZAW For design KM, KSC, KMB, ASM, ZAW, NLIL.L.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230
Plug-pictogram stanga sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLO
Pictogramă inserabilă stânga jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTLU
Pictogramă inserabilă dreapta sus ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRO
Pictogramă inserabilă dreapta jos ptr.Design AM, KBM, KS, VM viewing distance: 22m	NLAMPIKTRU
Pictograph set "fire protection" VD: 22 m. (2x4 pcs.) pictographs according to ISO 7010 included: fire extinguisher, fire hose reel, fire alarm call point, collection of firefighting equipment, suitable for design KS, AM, KB	NLKS4FIRE
Pictograph set "first aid" vd: 22m (2x4 pcs.) pictographs according to ISO 7010 included: first aid, Hazard duty point, Automated heart defibrillator, emergency window with escape ladder, suitable for design KS, AM, KB	NLKS4HELP
Brat perete alb ptr.C.il. Design KM/KS	NLAWKSU
Design pair of pendants 500 mm alb, wired Suitable for design KS, KM, KMB in self contained version with LiFePO4 battery	NL2DWKMKS
Protectia cos pentru KD, KM, KS, LM, VM, RI, RM	NLBALL1
cablu de suspensie	NLDSA000
Suspensie cablu 2000mm, 1 pereche	NLCORD2
Suspensie cablu 4000mm, 1 pereche	NLCORD4