

Date tehnice pentru produs: NLZAAC08WL

C.il. Siguranta ZA Wireless LED 8h 230VAC

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, WirelessControl Professional type



Fișe tehnice


Lungime (mm)	315,00
Înălțime (mm)	140,00
Adâncime netă (mm)	65,00
Masă netă (kg.)	2,20
Tip iluminare	lampă de siguranță
EB-ZB	Self contained luminaire
Funcție	WirelessControl Low Temperature
Versiune	lampă de metal
Tip	ZA
Culoare	antracit
Timp autonomie (h)	8
Sursă de lumină	LED (2W)
Lumen	76
Tensiunea de alimentare (V)	230V AC 50Hz ±20%
Baterie (V/Ah)	3,2/3,0 LiFePO4
grad de protecție	IP65
Montaj	Montaj de perete
Temperatura minimă a mediului ambiant (°C)	-25
Temperatura maximă a mediului ambiant (°C)	40
AA Class E 8101	AA3 AA4 AA5

Fișe tehnice - Continuare


Fabricant

Schrack


Dimensions (mm)

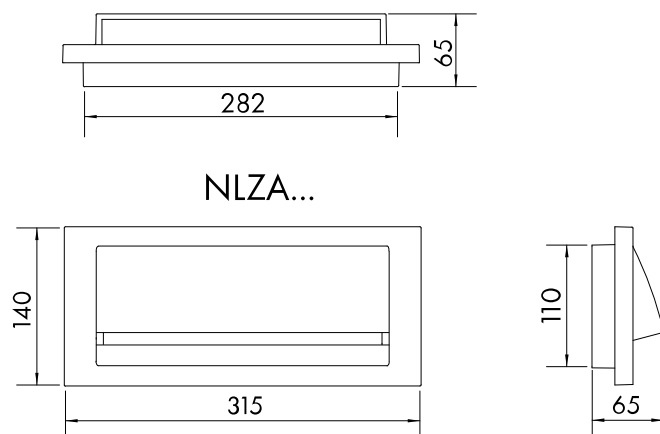

Drilling distances (mm)

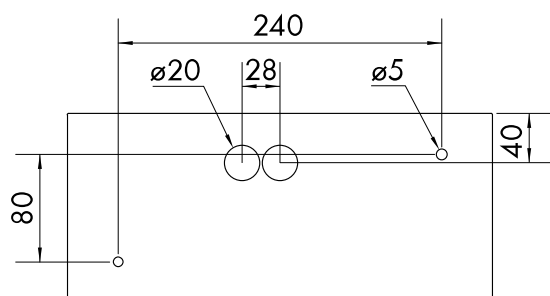

Housing IP54 for COOL-version (mm)

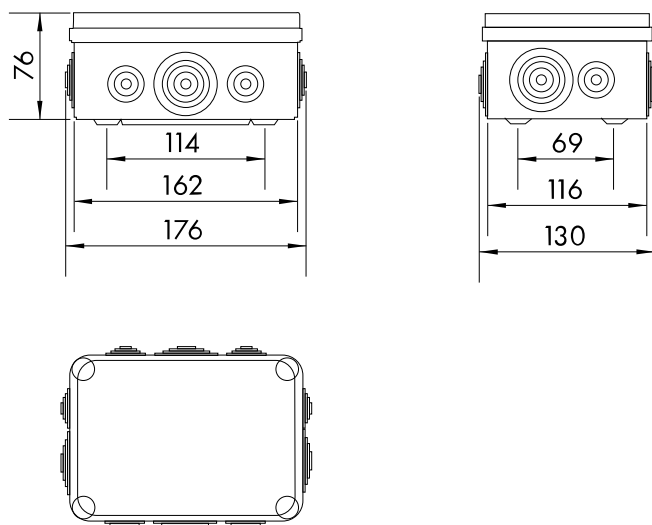

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80 -8h autonomy time

Montagehöhe [m]					
2,00	0,00	2,20	4,12	8,52	3,20
2,50	0,00	2,18	2,59	8,11	1,62
3,00	0,00	2,13	0,54	6,42	0,00
3,50	0,00	1,90	0,21	3,00	0,00
4,00	0,00	0,00	0,00	0,00	0,00

Tabel articole

Descriere	Cod comandă
C.il. Siguranta ZA Wireless LED 8h 230VAC Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, central switching, wall mounting, WirelessControl Professional type	NLZAAC08WL
Accesorii opționale	
Accu 3,2V 3,0Ah LiFePO4 ptr.LED C.il KM,KSC,KMB,ASM,ZAW For design KM, KSC, KMB, ASM, ZAW, NLILL.23., LiFePO4 - Lithium-iron phoshpate battery , UN3480 - UN 3480 : Lithium-Ion batteries, compatible to accu 3,2V 3,3Ah	NLAKKU3230